

TO THOSE WHO  
POWER LIFE, WE SAY

**MAY THE**

**POWER**

**ALWAYS BE  
WITH YOU**



**CPCB IV+  
COMPLIANT**

INDIA'S LARGEST  
FLEET OF GENSETS

**200-625 kVA**

## 200-625 kVA

Prime Rating at rated rpm (as per ISO8528)	kVA	200 HD	320 HD	500 HD	625 HD
	kW	160	256	400	500
Genset Model		KG4-200WS1	KG4-320WS (HD)	KG4-500WS (HD)	KG4-625WS11 (HD)
Frequency	Hz		50		
Power Factor	lagging		0.8		
Voltage	V		415 (30)		
Governing class (As per ISO 8528 Part-V)			G3		
DG set Noise level at 1 meter	dBA		<75 (Genset with canopy)		
Fuel tank capacity (Standard DG set)	Ltrs	460	850	990	990
Weight of genset with canopy (approx.) <sup>A</sup>	Dry	Kg	3850	6750	8140
	Wet	Kg	3960	6950	8360
Overall dimensions of genset <sup>A</sup>	Length	mm	4550	5100	6500
	Width	mm	1700	2125	2125
	Height	mm	2005	2610	2710
Electrical Battery Starting Voltage	Volts-DC		24		
<b>ENGINE</b>					
Engine Model		6SL90ETA 4G1	DV8ETA 4G1	DV10ETA 4G1	DV12ETA 4G1
Rated output (Prime Continuous rating as per ISO 8528-1)	kW	183.8	294.2	447.2	561.1
	HP	250	400	608	763
No. of cylinder	Number	6	8	10	12
Cubic capacity <sup>B</sup>	Ltrs	8.86	15.92	19.9	23.88
Bore x Stroke	mm	118 x 135	130 x 150	130 x 150	130 x 150
Rated Speed	RPM	1500	1500	1500	1500
Aspiration	NA/TC/TA	TA	TA	TA	TA
Lube Oil change period	hrs.		500		
Lube oil Sump Capacity	Ltrs	27	40	50	73
Coolant Capacity	Ltrs	35	55	80	175
Adblue/ DEF capacity	Ltrs	45		45 x 2	
<b>ALTERNATOR</b>					
Insulation Class				H	
Alternator Efficiency (at 100% load) 0.8 pf**	%	94.2	94.6	94.8	95.7
Max Voltage Dip at Full Load 0.8 pf lag				< 20 %	
Max Time to build up rated voltage at Rated RPM				< 2 sec, provided engine reach the rated speed	

<sup>A</sup> Tolerances Apply

<sup>B</sup> These Weight are for handling & transportation only  
\*\* Efficiency of Alternator as per standards IEC60034-1

### Notes

AdBlue used should follow ISO 22241.  
Above specifications are subject to change without prior notice due to continuous technical development.  
For intermediate ratings, kindly contact nearest Kirloskar office.  
For Site Conditions other than standard operating conditions consult Kirloskar Oil Engines for available prime power.

### 7 Easy steps for a happy Genset Ownership

- Insist on a load-study
- Select the Genset rating as per the load-study and with sufficient margin for future load expansion
- Apply site-selection guidelines carefully
- Insist on installation in line with Kirloskar Green guidelines
- Ensure adequate size and proper connection of cables
- Understand the Genset operation & maintenance procedures during commissioning
- Follow routine maintenance protocols through authorized Kirloskar Green service dealers



# Genset kVA 200 to 625 kVA Features



## Prime rating and Stand-by rating


'Prime power' is designed for Unlimited hours, as compared to 'Emergency stand-by' designed for 200 hours in a year. Prime rated Gensets also permit 10% temporary overloading. Users need to carefully select the Genset rating to meet their requirement. Kirloskar offers Prime power as a standard offer. Contact Kirloskar for stand-by ratings.



## No replacement to displacement

Engine capacity (cc) plays a vital role in Genset performance. Higher engine capacity leads to a robust and stable Genset performance.

Higher engine capacity also enables the Genset to respond quickly & positively to sudden load additions.

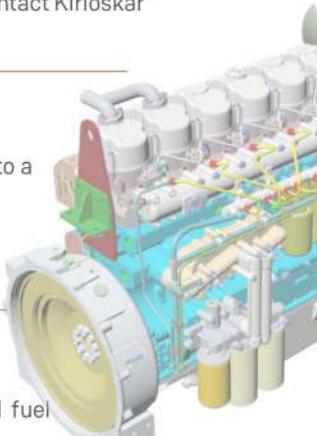

## Best-in-class Fluid Efficiency (Fuel & DEF)

Kirloskar Gensets offer a unique combination of CPCB norm compliance and enhanced fuel efficiency. Across the range, Kirloskar Gensets offer substantial savings in fuel cost.

### O2E Series (Optimal Operating Efficiency):

Genset ratings are selected based on the present load and future expansion. Fuel efficiency of most Gensets is optimized at the full rating of the Genset.

In practice, Gensets rarely get loaded to full capacity. Power demand variations across day & night, weekdays & weekends, summer & winter lead to an average 50-70% loading on Gensets.

Considering this practical situation, Kirloskar has extended fuel efficiency optimization from 100%, right up to 50% of rated load.



In line with fuel efficiency Kirloskar Genset ensures the better DEF efficiency and accordingly optimized the DEF tank size. Combination of best-in-class fuel efficiency & O2E provides a double advantage.



## Common Rail Direct Injection System (CRDi):

Common rail diesel injection technology, popularly known as CRDi, provides a significant upgrade over traditional mechanical fuel injection systems. CRDi provides precise fuel control, multiple injections, enhanced performance, lower noise and reduced emissions. High pressure common rail system employed on Kirloskar CPCB IV+ Gensets maximizes fuel atomization, delivering a smooth and smoke free performance. Diesel filters with 'A' class filtration are used for CRDi Engines which enhances the filtration efficiency. Common rail fuel injection system will provide a new level of performance, efficiency, and reliability.



## Genset Monitoring at Your Finger Tips

Kirloskar gensets are enabled with Kirloskar remote monitoring system which shares Real Time Genset information and location Services. It can be accessed via mobile device or desktop. Kirloskar remote monitoring system also highlights any parameter which needs special attention. These critical indication alerts are sent to user mobile via text message. It also alerts nearest services dealer in case of any emergency break-down.



**Ask your Dealer for KRM  
login details & password**



#### On Board Diagnostics :

Superior uptime. Genset comes with advanced diagnostic capabilities, this coupled with Kirloskar remote monitoring system provides real time monitoring of performance, emission and service critical parameters this helps for early diagnosis to fix the issues before system breakdown



#### State of the art Genset Controller

Kirloskar Genset put the command in your hands. Micro-processor based Genset controllers display a host of genset parameters and put all controls at your fingertips.

#### KG745 Controller



#### Monitoring Features:

- Phase Voltages & Currents, Frequency, Genset kVA, kW, kWh, kVAr, Power Factor
- Lube oil Pressure, Engine Temperature, RPM, Run Hours, Number of starts, Fuel Level, Auto / Manual Stop, Battery charge condition, AMF feature

#### Diagnostic Features :

- Battery charging failure, Over/Under speed, Over Current, Over/Under Voltage, Over kW, Phase Seq., Phase missing, Mains Under voltage, Earth Fault trip, Low fuel level
- Low lube oil Pressure, High Engine Temperature, Low/High battery voltage, Low Fuel Level, Over Crank protection, Routine maintenance indicator, Genset Test Facility, Mains Frequency

#### Optional Features:

- Modbus Communication
- Synchronization



#### Peace-of-mind Ownership

Kirloskar Gensets have always been preferred for their robust design and reliability over long usage life. Kirloskar range carries the confidence of well-established and proven engine platforms. For compliance to revised CPCB norms, Kirloskar has carefully selected those technologies which not only retain, but enhance Gensets durability and on-site serviceability.

Thus, Kirloskar Gensets offer you many years of trouble-free performance; backed by the assurance of prompt support. Peace-of-mind driven by product reliability and low cost of ownership.




#### Alternator Features:

Kirloskar Alternator is compact in design & comes with AREP winding and Digital AVR. Auxiliary Regulation Excitation Principle (AREP) winding improves the Non-linear load handling capability, Motor starting capacity. Advanced Digital AVR improves the Voltage regulation and Response time.




#### Compact footprint:

Kirloskar CPCB compliant Gensets are having compact footprint which results in space saving. CPCB compliant technology is upgraded by maintaining the compact footprint of Genset.

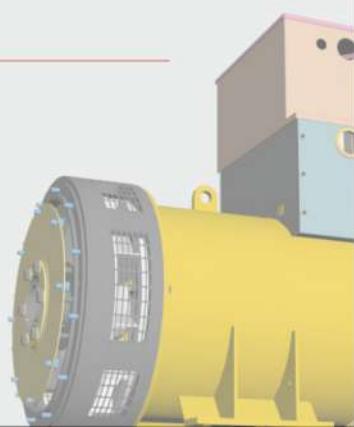

## Glimpses **CPCB IV+** Genset (200-625 KVA)

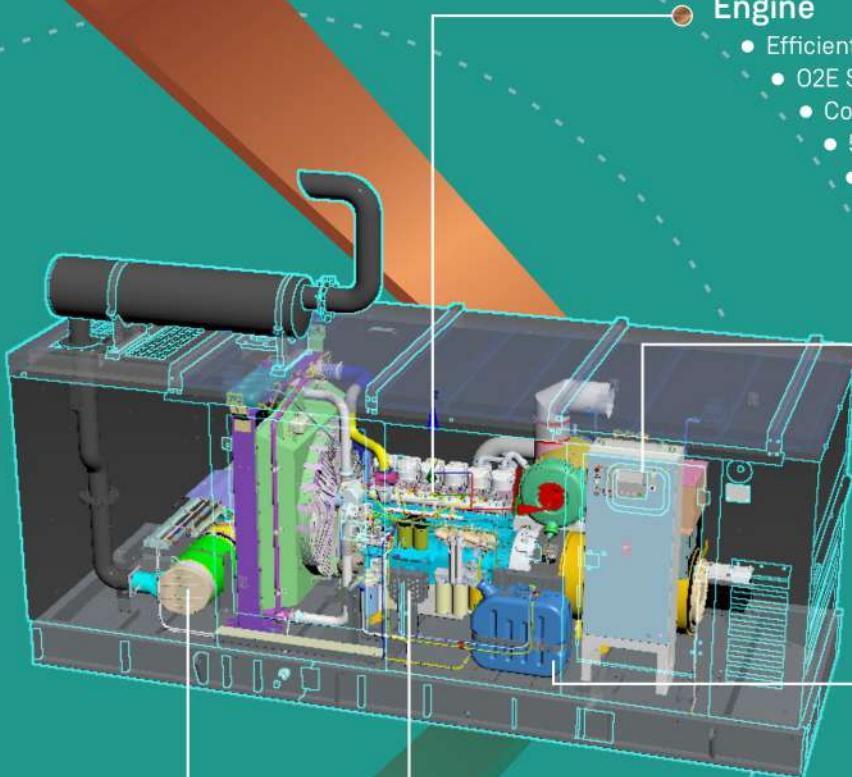

### Engine

- Efficient CRDi System
- O2E Series: Low emission, high efficiency engines
- Compact, Robust and Rugged Design
- 500 hours lube-oil change period
- Integral set - mounted radiator system, designed & tested for 50°C ambient temperature

### Controller

- Microprocessor based
- Graphical LCD display
- Best in class monitoring and diagnostic capability
- Integrable with AMF, synchronization (optional) & communication compatible

### DEF Tank

- DEF/Aqueous urea to sets off the chemical reaction with Exhaust gas
- Tank size is optimized in accordance to DEF consumption

### Supply Module & DCU

- Control & monitor the DEF

### Exhaust Gas Treatment System

- DOC & SCR system sets off the reaction to meet the latest CPCB norms
- Reduction in NOx & HC
- Reduction in PM

O2E - Optimal operating efficiency

DEF - Diesel exhaust fluid

DCU - Dosing control unit

DOC - Diesel oxidation catalyst

SCR - Selective catalytic reduction

## EFFICIENCY. INTEGRATED

### A KIRLOSKAR PROMISE

#### Efficient Products

- India's first IoT enabled digital genset
- Designed for convenient user experience
- Best-in-class fuel efficiency delivered
- Compact design & long life product
- Optimized consumption of lubricant oil
- Optimized total cost of ownership (TCO)
- All products tested before delivery

#### EFFICIENT PRODUCTS



#### EFFICIENT SOLUTIONS



#### Efficient Solutions

- Load sizing for every single genset order
- One stop power back-up solutions
- Serves complete application gamut
- Highly trained & experienced team
- Non-conventional solutions (bio-diesel)
- Specific solution for harsh environments
- Exhaust mgmt., foundation, cabling etc.

#### Efficient Service

- India's widest service dealer network
- Kirloskar connect-self-service application
- eFSR-Electronic field service report
- Over 6000 trained service engineers
- Over 600,000 machines under care
- 98%+ parts available at each outlet
- Flexible & economical AMC-Bandhan

#### EFFICIENT SERVICE



#### EFFICIENT NETWORK



#### Efficient Network

- Consistent, reliable & long-established
- 250+ expert touch points across India
- 500+ solution oriented professionals
- Uniform customer experience across
- Central system for enquiry to PRF
- Fair trade practices & Price transparency

#### Efficient Deliveries

- Cost-effective deliveries guaranteed
- Assured 7-day delivery of gensets
- Supports project management system
- Reduced working capital for customer
- Award-winning replenishment model
- Assurance of FRESH products always

#### EFFICIENT DELIVERIES



#### EFFICIENT 24X7 CARE



#### Efficient 24X7 Care

- 24 X 7 operational customer care centre
- Team of over 70 trained & focused exec.
- Tracking every service request till closure
- Centrally maintained CRM for all requests
- Satisfaction call after every SR closure
- Central sales lead tracking system
- Continuous NPS and CDI measurement

We offer products for every segment & take part in the India's growth story.



Infrastructure



Industry



IT/ITES



Hospitality



Health



Reality



Government



Logistics

**kirloskar**  
Oil Engines



+91 738 990 5333

Mark bearing word 'Kirloskar' in any form as a suffix or prefix is owned by Kirloskar Proprietary L td. and Kirloskar Oil Engines Ltd. is the Permitted User. This Catalog is copyrighted and may not be reproduced in any form not even parts of it, without previous written permission by copyright owners, Kirloskar Oil Engines L td. Product improvement is a continuous process. Kindly contact Kirloskar for latest information. Images are for illustration purposes only.

#### EKTELON ENGINEERING AND PROJECTS PRIVATE LIMITED

A16-SCHEME 78, PART I, DEWAS NAKA, INDORE 453771  
MADHYA PRADESH, INDIA

CONTACT - +91 738 990 7333 | 738 990 7144  
EMAIL - [sale@ektelonindia.in](mailto:sale@ektelonindia.in)  
WEB - <http://ektelonairpower.in>